

■ Main Dimensions

Length Overall (LOA)	95,62 m
Breadth / Depth / Summer Draft	35,00 m / 6,45 m / 4,50 m
GRT / NRT / DWT	7756 / 2327 MT / 9846 MT

■ Capacities

Fuel Oil / Ballast Water / Fresh Water	420 m³ / 15843 m³ / 416 m³
Sewage Water / Bilge Water / Dirty Oil	412 m³ / 4,6 m³ / 22,2 m³

■ Pumps

Ballast Pump	2 x 30 KW 300 m³/h at 20 meter head
Bilge Pump	H/Π
Dirty Oil Pump	2 x 4 KW 10m³/h at 35 meter head
Fresh Water Pump	2 x 2,2 KW 10 m³/h at 10 meter head
Fire Pump	2 x 0,75 KW 10 m³/h at 10 meter head
Sewage Pump	2 x 4 KW 20 m³/h 30 meter head
Fuel Oil Pump	2 x 2,2 KW 5 m³/h 25 meter

■ Radio & Navigation Equipment

Radar 1	JRC / JMA 3314
GPS 1	JRC / JLR-7500t
Navtex	JRC / NCR-333
Magn compass	CASSENS&PLATH21
Echosounder	JRC / JFE-380
VFH 1 radiotelephone	JRC / NCM-1770 / JHS 7705
EPIRB	TRON 40S MkII
UHF	Sailor SP3965 (2)
SART	JOTRON / TRON TR20
PLOTTER	POLAR / PCP 207 - PCP 212
WIND SPEED SYSTEM	WALKER P1249/ 2050 MK2

■ Life Saving

Life Raft	6 x 125 per
-----------	-------------

■ Fire Detection and Fire Alarm System

Class Approved Fire Detection System
Class Approved CO2 System in E/R
Water Sprinkler in Accommodation

■ Lifting Capacity

Main Frame Max Lifting Capacity (crawler crane)	1600 T
Crane Max Lifting Capacity	800 T

■ Generators

Caterpillar 550 KW / 737 HP (2 pcs)
Caterpillar 160 KW / 215 HP (1 pcs)

■ Anchor Equipment

Anchors	4500 kg HHP Anchor (2 pcs)
Anchor Chain	Lenght 522,5 m x Ø 60 mm Q3a Chain
Mooring Anchor	10000 kg Delta Flipper type HHP Anchor (8 pcs)

■ Mooring System Equipment

Mooring Lines	Length 1000 m (8 pcs)
Mooring Wire	Ø 44 mm 6x36 IWRC Steel Core
Mooring Winches	4 nos x 45 MT Operating 120 MT Break Load , 4 nos x 60 MT Operating 130 MT Break Load

■ Fresh Water Maker

50 Ton/Day



■ General

Name of Vessels	CAPTAIN LYCHKIN
Port of Registry / Flag	CAPTAIN LYCHKIN
Year/Place of built	2014 / TURKEY
Type	Accommodation work barge
Class	B.V. (Bureau Veritas)
IMO / Call sign / MMSI	N/A / EZHM / 434122800

Deck clear space / Capacity	Approximately 1,150 m² / 20 t/m²
-----------------------------	----------------------------------

■ Accommodation

Total POB	239
Cabins Layout	3 x 1 man = 3 Men
	20 x 2 men = 40 Men
	8 x 4 men = 32 Men
	6 x 5 men = 25 Men
	21 x 6 men = 126 Men
	1 x 8 men = 8 Men
	Total 59 Cabins = 239 Men

All cabins are fully air-conditioned, fitted with locker, desk and chair

■ Other Facilities

Hospital	2 Berth with toilet and bathtub
Offices	2 offices with desks, power outlet, internet and telephone connections
Recreation Room	3 x Recreation Room
Gymnasium	1 x Gymnasium (fully equipped)
Mess Room	2 x Mess room
Dinning Hall	1 x 120 Men
Praying Room	1 x 15 Men



iLK CONSTRUCTION

Head Office in Turkey

Yenisehir District Bayraktar Bulv.
Street No:2 34779 Atasehir
Istanbul
Tel : +90 (216) 455 55 44
Fax : +90 (216) 455 55 88

Turkmenistan

43 Shors Street

Ashgabat

Tel : +993 (12) 32 93 77 – 78
Fax : +993 (12) 32 03 17

Azerbaijan

100/C Nizami Street Nesimi Region

Baku


Tel/Fax : +994 (12) 404 81 67 – 68

U.A.E.

Lotus Plaza, 4B Street, Al Quoz

Dubai

Tel : +971 4 3806666
Fax : +971 4 3466668

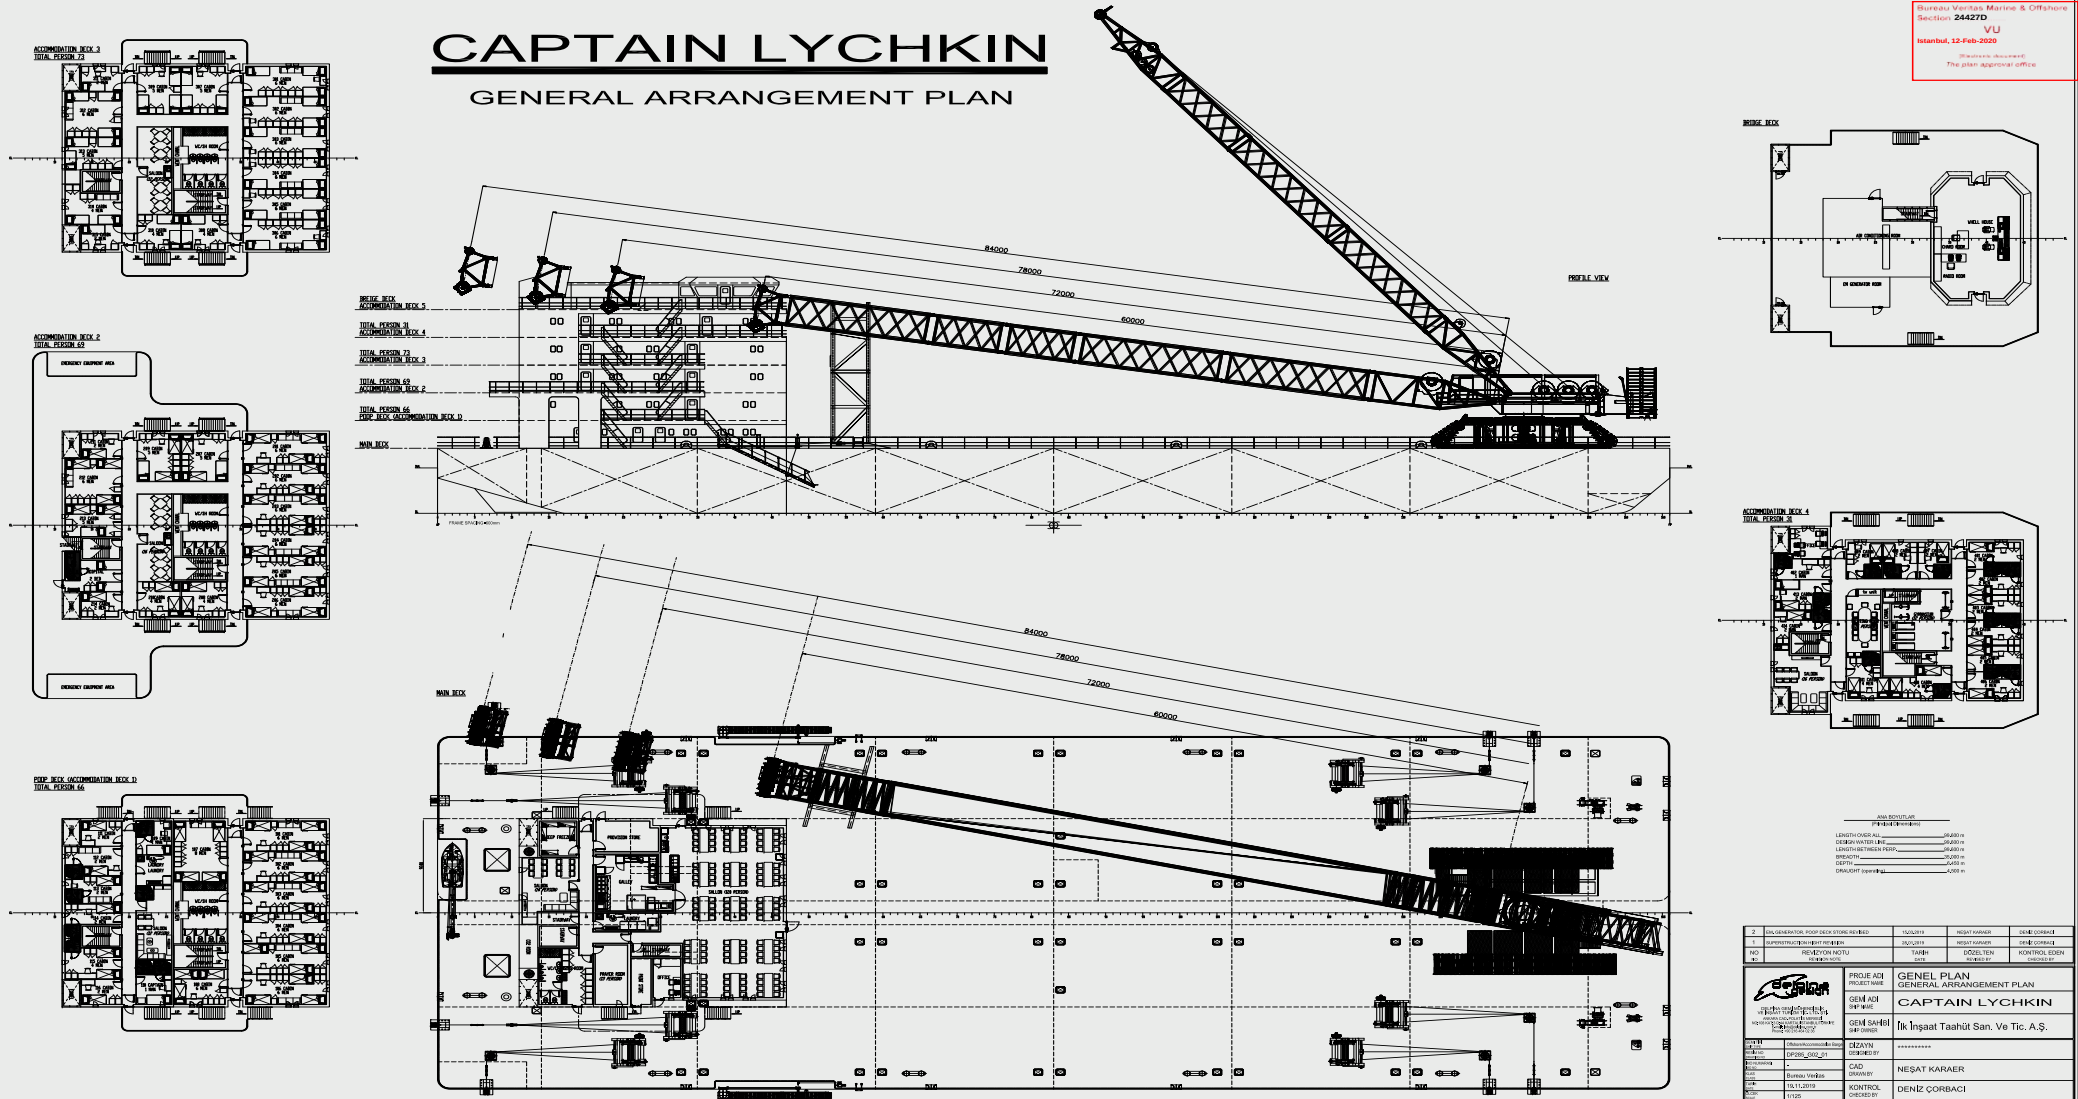

Dubai
Tel : +971 4 3806666
Fax : +971 4 3466668